

AquapHOx-T Flexible Underwater Transmitters

For Optical O₂, pH & Temperature Sensors

O₂

pH

T



**Real-time
Data Transmission**

NEW TECHNOLOGY

- Real-time Data Transmitter
- Shallow water & down to 4000 m
- Exchangeable sensor heads
- New pH sensor technology
- Ultra-High Speed O₂ sensor
- New Ultra-Trace O₂ sensors
- Unprecedented flexibility

INNOVATIVE UNDERWATER PLATFORM

PyroScience stands for innovative optical sensor technology: simple, compact & flexible sensor systems with expert customer support. The new all-in-one optical sensor platform AquapHOx is a cost-effective, flexible and easy-to-operate underwater optical sensor solution. It is available as long-term loggers and real-time data transmitters, and can be combined with a broad sensor portfolio for monitoring critical parameters and their dynamics in coastal ecosystems, open ocean and the deep sea.

AquapHOx Transmitter Devices

- Multi-Analyte Deep Sea Transmitter APOX-TX**
 Titanium housing, down to 4000m
 1 port for O₂, pH and optical T sensors
 Maximum flexibility (heads, ranges & analytes)
- Shallow Water O₂ Transmitter APOX-T-O₂**
 POM housing
 Variety of O₂ sensor heads and ranges
- Shallow Water pH Transmitter APOX-T-PH**
 POM housing
 Several pH sensor heads & ranges



General Device Specifications

Dimension	63 x 300 mm
Housing Material/Weight	
Deep Sea Version	Titanium / 1.31 kg
Shallow Water Version	POM / 0.406 kg
Compatible Optical Sensors	Optical sensors with underwater connector (-SUB) from PyroScience
Data Storage	No internal data storage
Max. Sample Rate	40 Hz (0.025 s interval)
Digital interface	RS485 (USB 2.0 adapter cable included)
Power Supply	5-15VDC (only RS485 / USB) 10-15 VDC (Analog Outputs)
Power Consumption	max. 30mA (+ currents used by analog current outputs)
Analog Output	2x 0-5V, 2x 4-20mA (16 bit each)
Digital Protocols	Modbus RTU or PyroScience protocol (switchable)
Temperature Sensor	Integrated for automatic T compensation of optical sensors



New State-of-the-art Optical O₂ & pH Sensors

Sensor Caps

- pH (total scale) _____
- Ultra-Trace O₂ _____
- (Ultra-) High Speed O₂ _____



AquapHOx Transmitter

Fiber-optic Sensors



Maximum Flexibility

- Exchangeable sensor heads for pH, O₂ & T
- Variety of sensor formats and measuring ranges
- Fiber-optic sensors & sensor caps

O₂ Sensors: Full Range, (Ultra-)High Speed, Ultra-Trace


O ₂ Measuring Range	• 0 - 23 mg/L
Full Range/High Speed	• 0 - 720 µmol/L
O ₂ Measuring Range	• 0 - 0.09 mg/L
Ultra-Trace	• 0 - 2.7 µmol/L
Detection Limit	• 0.01 mg/L
Full Range/High Speed	• 0.3 µmol/L
Detection Limit	• 0.05 µg/L
Ultra-Trace	• 1.3 nmol/L
Response Time (t90)	• Ultra-High Speed: <0.3 s • High Speed: <0.8 s • Full range: <3 s • Ultra Trace: <10 s
Influence of Pressure	ca. 1% / 1000m
Salinity Range	0 to 50 PSU
Temperature Range	-2°C to 50°C

Multiple Applications

- Fast water column profiling
- Eddy covariance measurements
- Trace O₂ detection in oxygen minimum zones or during de-oxygenation events
- Ocean pH monitoring on the pH total scale
- Contactless read-out of incubation chambers
- Profiling over surface structures & in sediments at high spatial resolution

pH Sensors: different versions available

pH Ranges	• PK7: pH 6.0 - 8.0 • PK8: pH 7.0 - 9.0 • PK8T: total scale
Resolution	• PK7: 0.003 at pH 7 • PK8(T): 0.003 at pH 8
Precision	0.02
Response Time (t90)	<60 s
Salinity Range	10 to 40 PSU
Temperature Range	5°C to 40°C

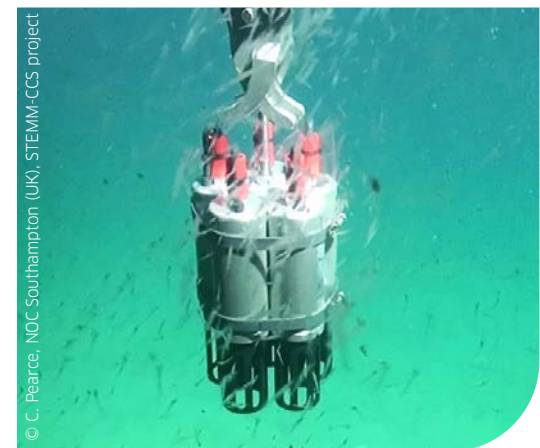

Deployment in the North Sea

© C. Pearce, NOC Southampton (UK), STEMM-CCS project

CONTACT AND SERVICE

Please contact us for more information
concerning our

- New AquapHOx Technology
- AquapHOx Transmitters & Loggers
- Optical pH, O₂ & T sensors
- Sensor formats and ranges
- Lab & portable sensor systems
- OEM solutions



This project has received funding from the EU's
Horizon 2020 research & innovation programme SME-2
under grant agreement No.82964

